CONTROLLER 3 EVO OXYGEN BAM

Composition

The **CONTROLLER 3 EVO OXYGEN BAM** is comprised of **GR80SGR OXY** braided rings, consisting of expanded graphite wires with a dedicated metal reinforcement. This material ensures minimal weight loss even in the most extreme conditions, meeting the stringent requirements of **EN14772** - section 6.7. BAM approved No. 2-28/2015 E for use with both liquid and gaseous oxygen.

Characteristics

The **CONTROLLER 3 EVO OXYGEN BAM** offers a unique combination of strength and durability, with a low friction coefficient ensuring smooth and reliable operation. Its reinforced structure and the quality of the graphite used make it ideal for high-temperature and pressure applications.

Applications

Specifically designed for industrial valves in oxygen service, the **CONTROLLER 3 EVO OXYGEN BAM** is the ideal choice to ensure effective stem sealing in critical environments. It provides superior performance and exceptional durability, making it essential for oxygen-sensitive industrial applications.

Tech Data


Maximum Temperature *°C*	**Maximum Oxygen Pressure** *bar*
up to 60	350
>60 up to 300	220

- Never use the product at its maximum rated temperature and pressure simultaneously. Consult the manufacturer for further information.



CONTROLLER 3 EVO OXYGEN BAM

The **CONTROLLER 3 EVO OXYGEN BAM** is an innovative gland packing designed specifically for industrial valves in oxygen service. Made from high-quality expanded mineral graphite and reinforced with special metal, this product offers reliable and safe performance in oxygen environments.

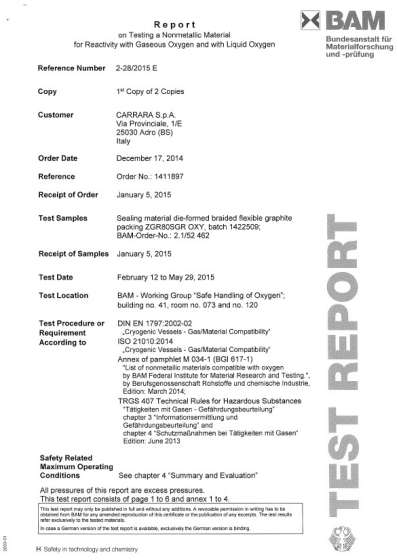

Report
on Testing a Nonmetallic Material
for Reactivity with Gaseous Oxygen and with Liquid Oxygen

BAM Bundesanstalt für Materialforschung und -prüfung

Reference Number	2-28/2015 E
Copy	1st Copy of 2 Copies
Customer	CARRARA S.p.A. Via Provinciale, 1/E 25030 Adro (BS) Italy
Order Date	December 17, 2014
Reference	Order No.: 1411897
Receipt of Order	January 5, 2015
Test Samples	Sealing material die-formed braided flexible graphite packing ZGR80SGR OXY, batch 1422509; BAM-Order-No.: 2.1/52 462
Receipt of Samples	January 5, 2015
Test Date	February 12 to May 29, 2015
Test Location	BAM - Working Group "Safe Handling of Oxygen"; building no. 41, room no. 073 and no. 120
Test Procedure or Requirement According to	DIN EN 1797:2002-02 „Cryogenic Vessels - Gas/Material Compatibility" ISO 21010:2014 „Cryogenic Vessels - Gas/Material Compatibility" Annex of pamphlet M 034-1 (BGI 617-1) "List of nonmetallic materials compatible with oxygen by BAM Federal Institute for Material Research and Testing.", by Berufsgenossenschaft Rohstoffe und chemische Industrie, Edition: March 2014; TRGS 407 Technical Rules for Hazardous Substances "Tätigkeiten mit Gasen - Gefährdungsbeurteilung" chapter 3 "Informationsermittlung und Gefährdungsbeurteilung" and chapter 4 "Schutzmaßnahmen bei Tätigkeiten mit Gasen" Edition: June 2013
Safety Related Maximum Operating Conditions	See chapter 4 "Summary and Evaluation"

All pressures of this report are excess pressures.
This test report consists of page 1 to 6 and annex 1 to 4.

This test report may only be published in full and without any additions. A revocable permission in writing has to be obtained from BAM for any provided reproduction of this certificate or the publication of any excerpts. The test results refer exclusively to the tested material(s).
In case a German version of the test report is available, exclusively the German version is binding.

TEST REPORT

M Safety in technology and chemistry

The information provided in this publication, as well as that supplied to users in other forms, is based on our experience and communicated according to the best knowledge available. However, since numerous factors beyond our knowledge and control may influence the use of the products, no warranty, explicit or implicit, is given regarding such content. The operating limits indicated do not constitute confirmation that these values can be applied simultaneously. Avoid using the product at the maximum temperature and pressure limits. The maximum temperature is sustainable only for short periods under specific conditions. Specifications may be changed without notice. The images in the DS may not exactly represent the product, its color and/or marking.

CARRARA GLOBAL SEALING SOLUTIONS

Carrara S.p.A.,
Via Provinciale 1/E - 25030 Adro - BS - Italia
tel. +39 030 7451121 carrara.it - info@carrara.it