



# GLASS PTFE PACKING V9944

## Composition

E glass yarns  
PTFE impregnation  
Inert lubricant

## Characteristics

The glass fiber packing V9944 is braided with E glass yarns. The packing is impregnated with PTFE and lubricants silicon free. V9944 is a general-purpose packing, extremely versatile and of excellent quality, meeting the requirements of cost-effectiveness and ease of use. Available in the style V9900 without impregnation.


## Applications

Packing suitable for general uses in dynamic services.

## Tech Data

	P bar	lbf/in2	Vm/S	f/pm	pH	T°C	T°F
	60	900	1	200	2 ÷ 12	-50 ÷ 280	-60 ÷ 540
	40	600	2	400			
	20	300	15	3000			

- Never use the product at its maximum rated temperature and pressure. Consult the manufacturer for further information.
- The peak temperature can be sustained only for short exposure periods.

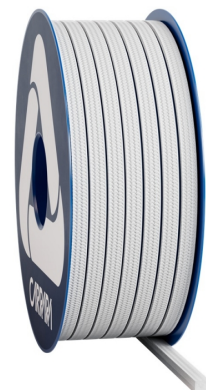

## Glass PTFE Packing V9944

The glass fiber packing V9944 is braided with E glass yarns. The packing is impregnated with PTFE and lubricants silicon free. Available in the style V9900 without impregnation.



The information provided in this publication, as well as that supplied to users in other forms, is based on our experience and communicated according to the best knowledge available. However, since numerous factors beyond our knowledge and control may influence the use of the products, no warranty, explicit or implicit, is given regarding such content. The operating limits indicated do not constitute confirmation that these values can be applied simultaneously. Avoid using the product at the maximum temperature and pressure limits. The maximum temperature is sustainable only for short periods under specific conditions. Specifications may be changed without notice. The images in the DS may not accurately represent the product's color and/or marking.




**Carrara S.p.A.**,  
Via Provinciale 1/E - 25030 Adro - BS - Italia  
tel. +39 030 7451121 [www.carrara.it](http://www.carrara.it) - [info@carrara.it](mailto:info@carrara.it)



# GLASS PTFE PACKING V9944

sezione mm	sezione inch	kg/box	lbs/box	mt/box	ft/box	mt/kg	ft/lbs
3	1/8"	1	2.2	50.0	164.0	50.0	74.5
4	-	1	2.2	33.3	109.3	33.3	49.6
5	3/16"	1	2.2	20.0	65.6	20.0	29.8
6	-	2.5	5.5	35.7	117.1	14.3	21.3
6.5	1/4"	2.5	5.5	31.3	102.7	12.5	18.7
8	5/16"	2.5	5.5	19.2	63.0	7.7	11.4
9.5	3/8"	2.5	5.5	14.7	48.2	5.9	8.8
10	-	2.5	5.5	12.5	41.0	5.0	7.4
11	7/16"	2.5	5.5	11.4	37.4	4.5	6.8
12	-	2.5	5.5	9.6	31.5	3.8	5.7
12.7	1/2"	2.5	5.5	8.6	28.2	3.4	5.1
14	9/16"	5	11	13.9	45.6	2.8	4.1
16	5/8"	5	11	10.6	34.8	2.1	3.2
17.5	-	5	11	9.6	31.5	1.9	2.9
18	11/16"	5	11	8.3	27.2	1.7	2.5
19	3/4"	5	11	7.7	25.3	1.5	2.3
22	7/8"	5	11	6.0	19.7	1.2	1.8
25.5	1"	5	11	4.7	15.4	0.9	1.4

● The weight per meter and the packaging weight may have a tolerance of  $\pm 10\%$ . Other sizes and packaging options are available on request.

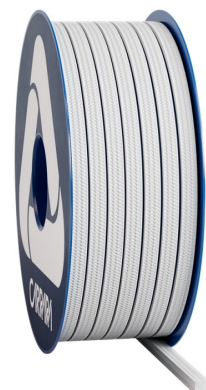

The information provided in this publication, as well as that supplied to users in other forms, is based on our experience and communicated according to the best knowledge available. However, since numerous factors beyond our knowledge and control may influence the use of the products, no warranty, explicit or implicit, is given regarding such content. The operating limits indicated do not constitute confirmation that these values can be applied simultaneously. Avoid using the product at the maximum temperature and pressure limits. The maximum temperature is sustainable only for short periods under specific conditions. Specifications may be changed without notice. The images in the DS may not accurately represent the product's color and/or marking.

**CARRARA**  
GLOBAL SEALING SOLUTIONS

**Carrara S.p.A.**,  
Via Provinciale 1/E - 25030 Adro - BS - Italia  
tel. +39 030 7451121 [www.carrara.it](http://www.carrara.it) - [info@carrara.it](mailto:info@carrara.it)