



# GRAPHITE GASKETING SHEET

## Composition

High-purity expanded mineral graphite Industrial Grade with tanged or smooth SS316L sheet if required by the style.

## Characteristics

The expanded mineral graphite Planigraph™ meets the requirements of the latest update of the EU directive 2011/65/EC (RoHS). This type of gasket ensures a reliable and durable sealing, making it an ideal option for all industrial applications, from the simplest to the most demanding.

## Applications

Expanded mineral graphite is also known for its chemical resistance, making it suitable for applications involving almost all fluids except for oxidants. In addition, expanded mineral graphite gaskets can be easily cut and shaped to fit the specific needs of the application. Thanks to its high thermal resistance, expanded mineral graphite can withstand high temperatures without damage or deformation, ensuring a reliable and safe sealing.


## Tech Data

Planigraph™ Graphite Gasketing Sheet

Feature	UM	LG	LGR	LGRF	LGRHDI
Graphite density	gr/cm3	1.0	1.0	1.0	1.0
Carbon Content	%	≥ 98.0	≥ 98.0	≥ 98.0	≥ 98.0
Ash Content	%	< 2.0	< 2.0	< 2.0	< 2.0
Sulphur Content	ppm	≤ 1000	≤ 1000	≤ 1000	≤ 1000
Halogen Content	ppm	≤ 200	≤ 200	≤ 200	≤ 200
Tensile Strength	MPa	≥ 4.0	≥ 4.0	≥ 4.0	≥ 4.0
Compression ratio	%	40 - 50	40 - 50	35 - 55	25 - 35
Recovery	%	> 7	> 7	≥ 9.0	> 15
Relaxation stress 16h, 300°C, initial stress 50 N/mm2	N/mm2	> 45	> 45	> 45	> 45
Maximum assembly load RT	N/mm2	40	60	140	200
Temperature range service	°C	-200 / 550	-200 / 550	-200 / 550	-200 / 550
Maximum operating pressure	bar	40	75	100	200

- With weakly oxidizing agents and hot air, the temperature must be limited to 450 °C.
- Flexible graphite and carbon yarns shall not be used with oxidizing fluids.
- Do not use the product at maximum temperature values or under pressures higher than those typical of flue gases. Contact the manufacturer for further information.
- Other gasketing sheet dimensions and thicknesses are available on request.
- With steam and non-oxidizing fluids, the temperature must be limited to 550°C.
- The dimensional tolerances of the gasketing sheets are: W and L ±3.0%, H ±10.0%.

Size	1000 x 1000 - 1500 x 1500 mm	40"x40" - 60"x60"
Thickness	1.0 ÷ 3.0 mm	1/32" ÷ 1/8"

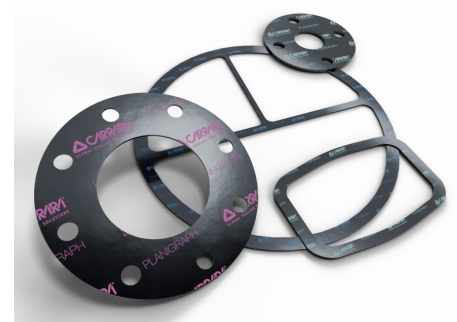

## Graphite Gasketing Sheet

- The Planigraph™ sales program includes the following items  
Premium grade and Industrial Grade:
- LG without insert
- LGR with single smooth insert
- LGRF with single or multiple tanged inserts
- LGRHDI with multiple smooth inserts

The maximum allowable load on the expanded graphite gasket depends on the type and number of metallic inserts and is strongly correlated with the effective sealing surface area of the gasket. It is always advisable to check the ratio between [De-Di], where De and Di refer to the diameters of the parts of the gasket effectively engaged by the flange compression, and the gasket thickness. The ratio should be at least 4. On WN RF flanges, gaskets can be applied up to the pressure class 300 psi. Please refer to the published technical data sheets for the application limits of the Planigraph™ line products.



The information provided in this publication, as well as that supplied to users in other forms, is based on our experience and communicated according to the best knowledge available. However, since numerous factors beyond our knowledge and control may influence the use of the products, no warranty, explicit or implicit, is given regarding such content. The operating limits indicated do not constitute confirmation that these values can be applied simultaneously. Avoid using the product at the maximum temperature and pressure limits. The maximum temperature is sustainable only for short periods under specific conditions. Specifications may be changed without notice. The images in the DS may not exactly represent the product, its color and/or marking.

**CARRARA**  
GLOBAL SEALING SOLUTIONS

**Carrara S.p.A.**,  
Via Provinciale 1/E - 25030 Adro - BS - Italia  
tel. +39 030 7451121 [carrara.it](http://carrara.it) - [info@carrara.it](mailto:info@carrara.it)