



GRAPHITE PACKING GR48R

Composition

Pure high carbon content expanded graphite yarns reinforced with Inconel™ wire.


Characteristics

The expanded graphite packing GR48R is a versatile and high-performing solution for many industrial applications. Made with expanded graphite yarns with high carbon content and reinforced with Inconel™, it can withstand high temperatures and pressures, as well as multiple industrial fluids and gases, except for highly oxidizing ones. Thanks to its easy cutting and installation, this universal packing is an ideal choice for sealing valves of all types. Additionally, the GR48R packing is also available in the non-reinforced version GR48, which still offers excellent performance in many industrial applications. With GR48R and GR48, you can ensure maximum safety and reliability for your industrial seals.


Applications

The expanded graphite braid GR48R is specifically designed to ensure perfect sealing on industrial valves of all types, with the ability to use various fluids and gases, excluding only highly oxidizing ones. Thanks to the high carbon content present in the expanded graphite yarns and the nickel-alloy metal reinforcement, this braid guarantees greater resistance and durability over time compared to the non-reinforced version GR48. However, to achieve optimal performance in the case of dynamic seals, it is recommended to use GR48R with the help of anti-extrusion rings. It is important to note that the maximum pressure for use in valves should not exceed 100 bar in the absence of anti-extrusion rings. In any case, the flexible graphite braid GR48R represents an ideal solution for industrial needs that require reliability, resistance, and versatility.

Tech Data

| | P bar | lbf/in2 | Vm/S | f/pm | pH | T °C | T °F |
|---|-------|---------|------|------|--------|------------------|-------------------|
|  | 300 | 4500 | 1 | 200 | 0 ÷ 14 | -200 ÷ 450 / 650 | -330 ÷ 840 / 1200 |

- Never use the product to the maximum temperature and pressure associated. Consult the manufacturer for further information
- The peak temperature can be sustained for short exposures
- With weakly oxidizing agents and hot air the temperature must be limited to 450 ° C
- With steam and non-oxidizing fluids the temperature must be limited to 650 ° C
- Graphite and carbon cannot be used with oxidizing fluids
- The packing shall be used with wiper anti-extrusion rings with valves over 100 bar

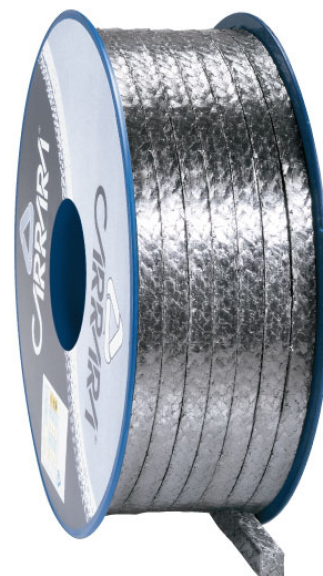

Graphite Packing GR48R

The Carrara graphite gland packing product range includes items made with all available graphite yarns, which, according to ASTM F2191 classification, are Type I—Continuous yarn, Type II—Staple yarn, and Type III—Flexible yarn. All graphite gland packings are protected with passive or active corrosion inhibitors (Grade A—Treated with corrosion inhibitor), although untreated gland packings (Grade B—No corrosion inhibitor) are available on demand. The performer and premium grade product ranges include Class 2 items, while the Industrial grade product range offers Class 1 products. Carrara graphite gland packings are specialized for each application, and a proper selection of the item allows for maximizing the sealing performance while reducing the component management costs.



The information in this publication, as well as any additional information provided to users, is based on experience and is shared to the best of our current knowledge. However, due to numerous factors beyond our knowledge and control that may affect the use of these products, no warranties are provided or implied regarding this information. The operating limits presented in this publication do not imply that these values can be applied simultaneously. Do not use the product at the maximum temperature and pressure values simultaneously. The maximum temperature is suitable only for short-term exposure under specific conditions. Specifications are subject to change without prior notice. The picture in the DS may not accurately depict the exact color and/or markings of the product.

 **CARRARA**
GLOBAL SEALING SOLUTIONS

Carrara S.p.A.,
Via Provinciale 1/E - 25030 Adro - BS - Italia
tel. +39 030 7451121 / fax +39 030 7451130
www.carrara.it - info@carrara.it



GRAPHITE PACKING GR48R

| sezione mm | sezione inch | kg/box | lbs/box | mt/box | ft/box | mt/kg | ft/lbs |
|------------|--------------|--------|---------|--------|--------|-------|--------|
| 3 | 1/8" | 1 | 2.2 | 100.0 | 328.1 | 100.0 | 149.0 |
| 4 | - | 1 | 2.2 | 47.4 | 155.5 | 47.4 | 70.6 |
| 5 | 3/16" | 1 | 2.2 | 29.4 | 96.5 | 29.4 | 43.8 |
| 6 | - | 2.5 | 5.5 | 52.1 | 170.9 | 20.8 | 31.0 |
| 6.5 | 1/4" | 2.5 | 5.5 | 50.0 | 164.0 | 20.0 | 29.8 |
| 8 | 5/16" | 2.5 | 5.5 | 29.8 | 97.8 | 11.9 | 17.8 |
| 9.5 | 3/8" | 2.5 | 5.5 | 21.3 | 69.9 | 8.5 | 12.7 |
| 10 | - | 2.5 | 5.5 | 19.2 | 63.0 | 7.7 | 11.4 |
| 11 | 7/16" | 2.5 | 5.5 | 15.9 | 52.2 | 6.4 | 9.5 |
| 12 | - | 2.5 | 5.5 | 13.2 | 43.3 | 5.3 | 7.9 |
| 12.7 | 1/2" | 2.5 | 5.5 | 11.9 | 39.0 | 4.8 | 7.1 |
| 14 | 9/16" | 5 | 11 | 20.0 | 65.6 | 4.0 | 6.0 |
| 16 | 5/8" | 5 | 11 | 14.7 | 48.2 | 2.9 | 4.4 |
| 17.5 | - | 5 | 11 | 13.3 | 43.6 | 2.7 | 4.0 |
| 18 | 11/16" | 5 | 11 | 11.9 | 39.0 | 2.4 | 3.5 |
| 19 | 3/4" | 5 | 11 | 10.6 | 34.8 | 2.1 | 3.2 |
| 22 | 7/8" | 5 | 11 | 7.9 | 25.9 | 1.6 | 2.4 |
| 25.5 | 1" | 5 | 11 | 6.2 | 20.3 | 1.2 | 1.8 |

- The weight per meter and the packaging's weight may have a tolerance of +/- 10%. Other sizes and packaging are available on demand.



The information in this publication, as well as any additional information provided to users, is based on experience and is shared to the best of our current knowledge. However, due to numerous factors beyond our knowledge and control that may affect the use of these products, no warranties are provided or implied regarding this information. The operating limits presented in this publication do not imply that these values can be applied simultaneously. Do not use the product at the maximum temperature and pressure values simultaneously. The maximum temperature is suitable only for short-term exposure under specific conditions. Specifications are subject to change without prior notice. The picture in the DS may not accurately depict the exact color and/or markings of the product.

CARRARA
GLOBAL SEALING SOLUTIONS

Carrara S.p.A.,
Via Provinciale 1/E - 25030 Adro - BS - Italia
tel. +39 030 7451121 / fax +39 030 7451130
www.carrara.it - info@carrara.it