



# GRAPHITE PACKING GR8807 INCOBRAID®

## Composition

- P.A.N. carbon yarns with nickel-alloy micro-filament
- Pure colloidal graphite
- Inorganic inhibitor of corrosion

## Characteristics

GR8807 INCOBRAID® is made with discontinuous PAN carbon yarns, reinforced with discontinuous metallic micro-filaments. The sealing rings are highly elastic due to a special impregnation process that is carried out in three stages: on each yarn, during braiding, and on the packing body with a mixture rich in inorganic corrosion inhibitors and colloidal graphite. GR8807 INCOBRAID® is a special packing that exhibits extraordinary elastic recovery and excellent extrusion resistance. It has been designed for H.P./H.T. valves that are frequently operated in steam, hydrocarbon, and chemical service.


## Applications

GR8807 INCOBRAID® is an excellent material for sealing industrial valves under high temperature and high-pressure conditions. Specifically, it is particularly suitable for use in power plants, refineries, and petrochemical plants, where extreme conditions require materials that can deliver superior performance. Graphite packings are characterized by their excellent elasticity, which enables them to adapt to changes in pressure and temperature over time without compromising the seal of the system.

## Tech Data

	P bar	lbf/in2	Vm/S	f/pm	pH	T°C	T°F
	300	4500	1	200	0 ÷ 14	-100 ÷ 450 / 650	-150 ÷ 840 / 1200
	80	1200	1	200			

- Never use the product at its maximum rated temperature and pressure. Consult the manufacturer for further information.
- The peak temperature can be sustained only for short exposure periods.
- With weakly oxidizing agents and hot air, the temperature must be limited to 450 °C.
- With steam and non-oxidizing fluids, the temperature must be limited to 650 °C.
- Flexible graphite and carbon yarns shall not be used with oxidizing fluids.

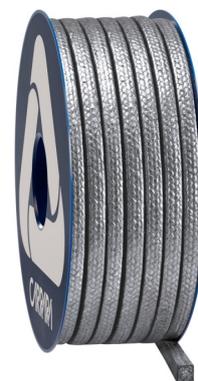

## Graphite Packing GR8807 INCOBRAID®

The Carrara graphite gland packing product range includes items made with all available graphite yarns, which, according to ASTM F2191 classification, are Type I—Continuous yarn, Type II—Staple yarn, and Type III—Flexible yarn. All graphite gland packings are protected with passive or active corrosion inhibitors (Grade A—Treated with corrosion inhibitor), although untreated gland packings (Grade B—No corrosion inhibitor) are available on demand. The performer and premium grade product ranges include Class 2 items, while the Industrial grade product range offers Class 1 products. Carrara graphite gland packings are specialized for each application, and a proper selection of the item allows for maximizing the sealing performance while reducing the component management costs.



The information provided in this publication, as well as that supplied to users in other forms, is based on our experience and communicated according to the best knowledge available. However, since numerous factors beyond our knowledge and control may influence the use of the products, no warranty, explicit or implicit, is given regarding such content. The operating limits indicated do not constitute confirmation that these values can be applied simultaneously. Avoid using the product at the maximum temperature and pressure limits. The maximum temperature is sustainable only for short periods under specific conditions. Specifications may be changed without notice. The images in the DS may not exactly represent the product, its color and/or marking.



**Carrara S.p.A.**,  
Via Provinciale 1/E - 25030 Adro - BS - Italia  
tel. +39 030 7451121 [carrara.it](http://carrara.it) - [info@carrara.it](mailto:info@carrara.it)



# GRAPHITE PACKING GR8807 INCOBRAID®

<

sezione mm	sezione inch	kg/box	lbs/box	mt/box	ft/box	mt/kg	ft/lbs
3	1/8"	1	2.2	100.0	328.1	100.0	149.0
4	-	1	2.2	50.0	164.0	50.0	74.5
5	3/16"	1	2.2	25.0	82.0	25.0	37.2
6	-	2.5	5.5	50.0	164.0	20.0	29.8
6.5	1/4"	2.5	5.5	41.7	136.8	16.7	24.8
8	5/16"	2.5	5.5	31.3	102.7	12.5	18.7
9.5	3/8"	2.5	5.5	20.8	68.2	8.3	12.4
10	-	2.5	5.5	19.2	63.0	7.7	11.4
11	7/16"	2.5	5.5	15.6	51.2	6.3	9.3
12	-	2.5	5.5	13.2	43.3	5.3	7.9
12.7	1/2"	2.5	5.5	11.9	39.0	4.8	7.1
14	9/16"	5	11	20.0	65.6	4.0	6.0
16	5/8"	5	11	14.7	48.2	2.9	4.4
17.5	-	5	11	13.2	43.3	2.6	3.9
18	11/16"	5	11	11.9	39.0	2.4	3.5
19	3/4"	5	11	10.6	34.8	2.1	3.2
22	7/8"	5	11	8.6	28.2	1.7	2.6
25.5	1"	5	11	6.7	22.0	1.3	2.0



- The weight per meter and the packaging weight may have a tolerance of  $\pm 10\%$ . Other sizes and packaging options are available on request.



The information provided in this publication, as well as that supplied to users in other forms, is based on our experience and communicated according to the best knowledge available. However, since numerous factors beyond our knowledge and control may influence the use of the products, no warranty, explicit or implicit, is given regarding such content. The operating limits indicated do not constitute confirmation that these values can be applied simultaneously. Avoid using the product at the maximum temperature and pressure limits. The maximum temperature is sustainable only for short periods under specific conditions. Specifications may be changed without notice. The images in the DS may not exactly represent the product, its color and/or marking.

**CARRARA**  
GLOBAL SEALING SOLUTIONS

**Carrara S.p.A.**,  
Via Provinciale 1/E - 25030 Adro - BS - Italia  
tel. +39 030 7451121 [carrara.it](http://carrara.it) - [info@carrara.it](mailto:info@carrara.it)