PACKING EXTRACTORS

Composition

Packing extractors, consisting of shafts and tips, available according to the following purchasing options:

- Complete kit consisting of 4 extractors, made up of shafts and spiral tips of different sizes (E0 + E1 + E2 + E3) and 3 spare spiral tips (P1 + P2 + P3);
- Individual extractors, consisting of shafts and spiral tips of different sizes (E0 or E1 or E2 or E3);
- Individual spare spiral tips (P1 or P2 or P3) or screw tips (V1 or V2 or V3).

Note: extractor E0 does not feature an interchangeable tip.

Characteristics

Packing extractors are made of stainless steel to ensure a long service life of the product.


Applications

The use of Carrara extractors is intended for the maintenance of packing in industrial pumps and valves.

Tech Data

PACKING EXTRACTORS							
Code	**Type**	**Stem**	**Diameter of screw bit**	**Diameter of shaft**	**Lenght of screw bit**	**Overall Lenght**	**Recommend for packing space size**
E0	Fix	Flexible	5/32"	7/64"	20,5 mm	178 mm	5/32" – 1/4"
E1	Interchangeable	Flexible	7/32"	3/16"	25 mm	178 mm	1/4" – 5/16"
E2	Interchangeable	Flexible	9/32"	1/4"	31 mm	279 mm	3/8"
E3	Interchangeable	Flexible	12/32"	5/16"	37,5 mm	358 mm	7/16" – 1/2"

EXTRACTOR REPLACEMENT TIPS		
Code	**Type**	**Lenght**
P1	Spiral	25 mm
P2	Spiral	31 mm
P3	Spiral	37,5 mm
V1	Screw Tips	35 mm
V2	Screw Tips	51,5 mm
V3	Screw Tips	67 mm

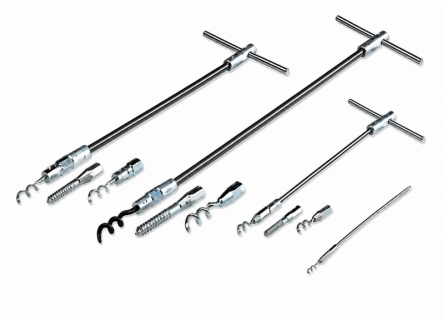

Packing extractors

Carrara's interchangeable-tip packing extractor kit provides operators with all the essential tools needed to effectively remove the packing to be replaced.

The kit includes a complete range of shafts and interchangeable tips, designed to operate accurately without compromising surface integrity.

The use of dedicated tools helps prevent scratches or damage to the shaft and stuffing box, which are common issues when improper or non-specific tools are used.

The information provided in this publication, as well as that supplied to users in other forms, is based on our experience and communicated according to the best knowledge available. However, since numerous factors beyond our knowledge and control may influence the use of the products, no warranty, explicit or implicit, is given regarding such content. The operating limits indicated do not constitute confirmation that these values can be applied simultaneously. Avoid using the product at the maximum temperature and pressure limits. The maximum temperature is sustainable only for short periods under specific conditions. Specifications may be changed without notice. The images in the DS may not exactly represent the product, its color and/or marking.

CARRARA GLOBAL SEALING SOLUTIONS

Carrara S.p.A.,
Via Provinciale 1/E - 25030 Adro - BS - Italia
tel. +39 030 7451121 carrara.it - info@carrara.it