



PLANISTEEL SW G OXY

Composition

Spiral wound gaskets are manufactured by coiling a V-profile metal strip together with a soft filler material, forming a flexible and pressure-resistant sealing element. The metal strip provides structural integrity and elasticity, while the filler ensures effective sealing performance. To enhance stability, control compression, and facilitate installation, the winding is supported by an outer guide ring and typically by an inner ring for RF flanges. Spiral wound gaskets for LMF flanges should be supported by an inner ring, although this is not mandatory, while those for LTG flanges are supplied without rings. The metal used for the inner rings matches that of the metal strip, whereas the guide ring material is user-selected. The stamped markings and color codes on the spiral wound gasket comply with ASME B16.20.

- **Metal strip:** any type of steel or alloy is available
- **Filler:** industrial graphite 99% Carbon content

Characteristics

Planisteel SW G OXY spiral wound gaskets are primarily manufactured in accordance with ASME B16.20, ASME B16.47 Series A and B, EN 12560-2, and EN 1514-2 standards, but gaskets made to other international standards or customized specifications are also available.


Planisteel SW G OXY spiral wound gaskets are **BAM Approved**, specifically designed and manufactured for high-concentration oxygen service applications. Made with selected materials and certified processes, they ensure maximum safety and absence of contaminants, providing high reliability in highly reactive environments. BAM Approvals no. 15019238E and 15019236E.

Performance Specifications	UM	Value
Minimum temperature	°C	-200
Maximum temperature - Oxygen Concentration 100%	°C	300
Maximum Temperature - Blended Oxygen	°C	450
Maximum Pressure - Oxygen Concentration 100%	bar	250
Maximum Pressure - Blended Oxygen	bar	according to the gasket rating
Min. Gasket Seating Stress - $S_{gmin-S_{L=0.001}}$	MPa	42
Min. Gasket Operating Stress - S_{gmin-O}	MPa	30
Max Gasket Operating Stress - S_{gmax}	MPa	280

The sealing factors were obtained from tests carried out on the SWCI design. This data sheet is for Oxygen Services. Graphite is not allowed with oxidizing fluids. With non-oxidizing fluids, the maximum temperature of 550°C refers to the RF flange applications while for those LMF and LTG the limit is 650°C.


Applications

Spiral wound gasket for industrial applications with liquid and gaseous oxygen.

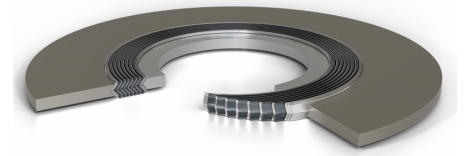

PLANISTEEL SW G OXY

The **Planisteel SW G OXY** gasket range, which includes spiral wound gaskets for all RF, LMF, and LTG flanges, manufactured with all metals and fillers required in industrial applications, consists of spiral wound gaskets produced in four designs. Planisteel SW G OXY spiral wound gaskets are qualified in accordance with major international TAT standards. Check the availability of Planisteel SW products on the [online stock](#).

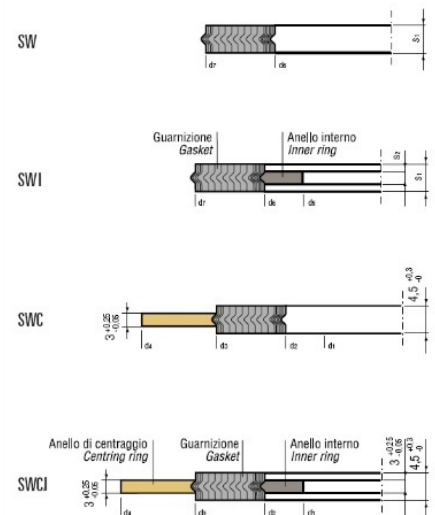

The information in this publication, as well as any additional information provided to users, is based on experience and is shared to the best of our current knowledge. However, due to numerous factors beyond our knowledge and control that may affect the use of these products, no warranties are provided or implied regarding this information. The operating limits presented in this publication do not imply that these values can be applied simultaneously. Do not use the product at the maximum temperature and pressure values simultaneously. The maximum temperature is suitable only for short-term exposure under specific conditions. Specifications are subject to change without prior notice. The picture in the DS may not accurately depict the exact color and/or markings of the product.

CARRARA
GLOBAL SEALING SOLUTIONS

Carrara S.p.A.,
Via Provinciale 1/E - 25030 Adro - BS - Italia
tel. +39 030 7451121 / fax +39 030 7451130
www.carrara.it - info@carrara.it