



PLANISTEEL SW TRIO

Composition

Spiral wound gaskets are manufactured by coiling a V-profile metal strip together with a soft filler material, forming a flexible and pressure-resistant sealing element. The metal strip provides structural integrity and elasticity, while the filler ensures effective sealing performance. To enhance stability, control compression, and facilitate installation, the winding is supported by an outer guide ring and typically by an inner ring for RF flanges. Spiral wound gaskets for LMF flanges should be supported by an inner ring, although this is not mandatory, while those for LTG flanges are supplied without rings. The metal used for the inner rings matches that of the metal strip, whereas the guide ring material is user-selected. The stamped markings and color codes on the spiral wound gasket comply with ASME B16.20.

- **Metal strip:** any type of steel or alloy is available
- **Filler:** industrial graphite 98% Carbon content and Megatherm Mica

Characteristics

Planisteel SW TRIO spiral wound gaskets are primarily manufactured in accordance with ASME B16.20, ASME B16.47 Series A and B, EN 12560-2, and EN 1514-2 standards, but gaskets made to other international standards or customized specifications are also available.


Planisteel SW TRIO spiral wound gaskets, specifically designed and manufactured using carefully selected materials and tightly controlled processes, ensure maximum safety and freedom from contaminants, offering high reliability even in the most critical oxidizing environments.

| Performance Specifications | UM | Value |
|---|-----|--------------------------------|
| Minimum temperature | °C | -200 |
| Maximum temperature with mild oxidizers | °C | 450 |
| Maximum Temperature | °C | 550 _{see note} |
| Maximum Pressure | bar | according to the gasket rating |
| Graphite and Mica Chemical Resistance | pH | 0 ÷ 14 |
| Min. Gasket Seating Stress - $S_{gmin-S_{L=0.001}}$ | MPa | 42 |
| Min. Gasket Operating Stress - S_{gmin-O} | MPa | 30 |
| Max Gasket Operating Stress - S_{gmax} | MPa | 280 |

The sealing factors were obtained from tests carried out on the SWCI design. Graphite is not allowed with oxidizing fluids. With non-oxidizing fluids, the maximum temperature of 550°C refers to the RF flange applications while for those LMF and LTG the limit is 650°C.


Applications

Spiral wound gaskets for piping flanges, valves, and industrial equipment.

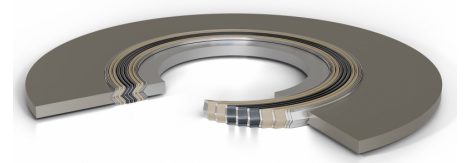

Planisteel SW TRIO

The **Planisteel SW TRIO** gasket range, which includes spiral wound gaskets for all RF, LMF, and LTG flanges and is manufactured using all metals and fillers required for industrial applications, is available in four different designs. **Planisteel SW TRIO** spiral wound gaskets are qualified according to major international type approval tests (TATs). Check the availability of Planisteel SW products in the [online stock](#).

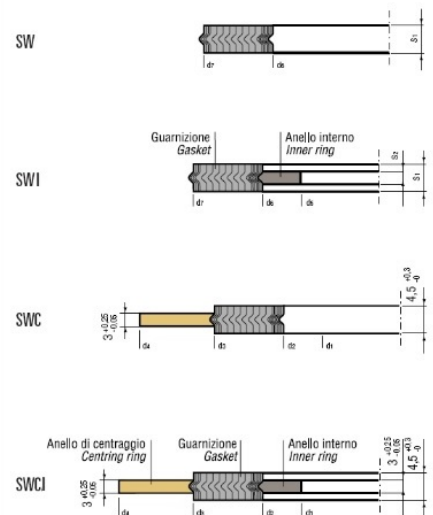

The information in this publication, as well as any additional information provided to users, is based on experience and is shared to the best of our current knowledge. However, due to numerous factors beyond our knowledge and control that may affect the use of these products, no warranties are provided or implied regarding this information. The operating limits presented in this publication do not imply that these values can be applied simultaneously. Do not use the product at the maximum temperature and pressure values simultaneously. The maximum temperature is suitable only for short-term exposure under specific conditions. Specifications are subject to change without prior notice. The picture in the DS may not accurately depict the exact color and/or markings of the product.

CARRARA
GLOBAL SEALING SOLUTIONS

Carrara S.p.A.,
Via Provinciale 1/E - 25030 Adro - BS - Italia
tel. +39 030 7451121 / fax +39 030 7451130
www.carrara.it - info@carrara.it