



TANK LID PACKING PT5504SG

Composition

PTFE yarns
EPDM rubber core




Characteristics

The PT5504SG packing is a reliable solution for applications that require the use of PTFE. Made with pure PTFE multifilament yarn and a rubber core, this packing shows great versatility as it can be used for many services where the use of PTFE with a more consistent recovery is required. It is important to remember that minimum/maximum temperatures and maximum pressures should not be associated. With these features, the PT5504SG packing is a reliable option to be used in all those applications that require a high level of sealing and high chemical resistance in almost the entire pH range. The standard product is made with EPDM, but other rubbers are available on-demand.


Applications

Seal for valves and pumps, PT5504SG packing offers high performance and lends itself to a wide range of applications where greater elasticity is required.

Tech Data

	P bar	lbf/in2	Vm/S	f/pm	pH	T°C	T°F
	50	750	1	200	3 ÷ 11	-35 ÷ 120	-30 ÷ 250
	50	750	10	2000			
	10	150	10	2000			

- Never use the product to the maximum temperature and pressure associated. Consult the manufacturer for further information
- The peak temperature can be sustained for short exposures

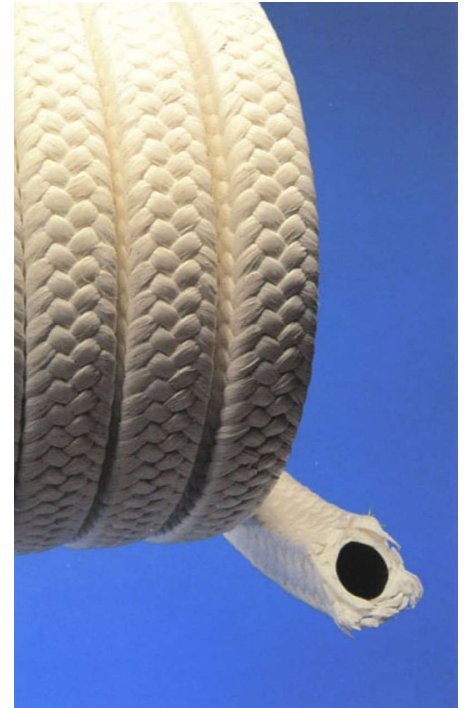

Tank Lid Packing PT5504SG

The family of the PTFE articles include a wide range of braided packings that can cover all applications that require the use of this material. White PTFE yarn is commonly used in gland sealing systems, both in static and dynamic applications with moderate-speed, thanks to the properties of this material, which ensures efficient and reliable sealing that can cover almost the entire pH range. The packings are available in both dry and lubricated configuration, in combination with other fibers such as aramid or with a rubber core. Among the special products are those intended for use with food and for oxygen service.



The information in this publication and otherwise provided to users is based on experience and is provided to the best of our current knowledge. Due to many factors which are beyond our knowledge and control affecting the use of the products, no warranties are given or are to be held implied with respect to such information. The operating limits shown in this publication do not constitute a statement that these values can be applied simultaneously. Do not use the product at the associated maximum temperature and pressure values. The maximum temperature can be sustained for short exposures in particular conditions. Specifications are subject to change without notice.

 **CARRARA**
GLOBAL SEALING SOLUTIONS

Carrara S.p.A.,
Via Provinciale 1/E - 25030 Adro - BS - Italia
tel. +39 030 7451121 / fax +39 030 7451130
www.carrara.it - info@carrara.it